

DS-KB2422T-IM
4-Wire HD Door Station



- HD TVI video quality
- Plug & Play
- Water and dust resistant (IP65)
- One-press to call


▪ Specification

Video parameters	
FOV	Horizontal: 117°, Vertical: 70°, Diagonal: 141°
Supplement light	IR light, up to 3 m
Audio parameters	
Audio input	1 built-in omnidirectional microphone (≤50 cm)
Audio output	1 built-in loudspeaker (30 cm/76 dB, 50 cm/72 dB)
Audio quality	Noise suppression and echo cancellation
Device interfaces	
Lock control	1 relay, max 30 V 1 A
Four-Wire interface	1
General	
Protective level	IP65, IK08
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	145 mm × 55 mm × 24 mm (5.71" × 2.17" × 0.94")
Power consumption	≤ 4 W
Material	Metal

▪ Available Model

DS-KB2422T-IM

▪ Dimension

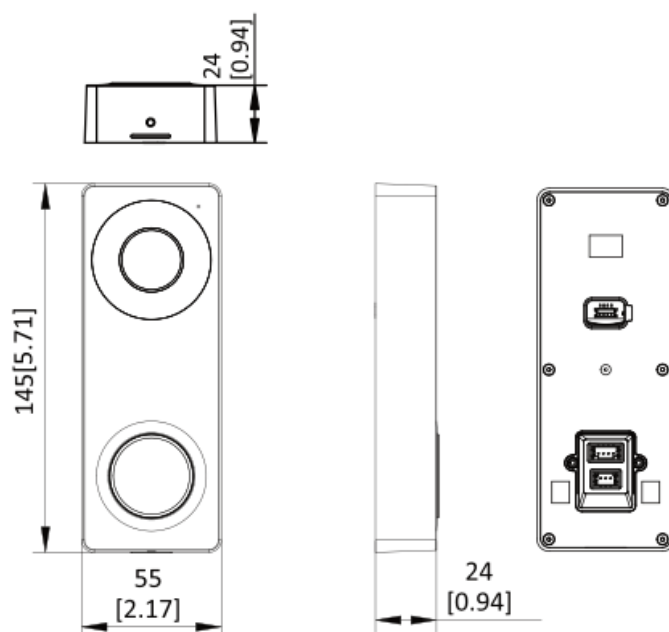

Unit:mm [inch]

- **Accessory**

- **Optional**

DS-KABV6113-A
Wall-mounted
bracket of villa door
station



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq