


## DS-K1T342DWX Face Recognition Terminal

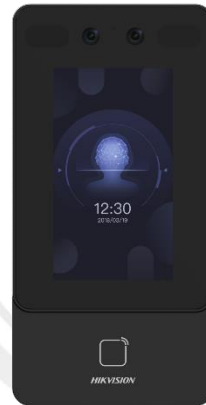

Face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster with higher accuracy. It also supports multiple authentication modes: face/card authentication, etc. It can be applied in multiple scenarios, such as buildings, enterprises, financial industries, and other important areas.

- Max.1500 faces capacity, and Max.3000 cards
- Face Recognition Terminal, 4.3-inch LCD touch screen, 2 Mega pixel wide-angle lens, Built-in M1/Felica/DESfire card reading module
- Two-way audio with client software, indoor station, and main station; Supports TCP/IP, Wi-Fi
- Supports ISAPI, ISUP5.0
- Configuration via the web client
- Face Recognition Distance: 0.3 m to 1.5 m
- Duration < 0.2 s/User
- Accuracy rate ≥ 99%
- Supports mask recognition

## ▪ Specification

| Display                |  |
|------------------------|--|
| Screen size            | 4.3 inch   |
| Operation method       | Capacitive touch screen  |
| Type                   | LCD  |
| Video                  |  |
| Lens                   | 2  |
| Resolution             | 2 MP   |
| Audio                  |  |
| Audio quality          | Noise suppression and echo cancellation  |
| Network                |  |
| Wired network          | Support  |
| Wi-Fi                  | Support, 2.4 G, 802.11b/g/n  |
| Interface              |  |
| Network interface      | 1 RJ-45, 10/100 M self-adaptive  |
| Lock control           | 1  |
| Exit button            | 1  |
| Door contact input     | 1  |
| TAMPER                 | 1  |
| RS-485                 | 1 RS-485 (Half duplex, HIKVISION)  |
| Wiegand                | 1 Wiegand(Hik 26bit,Hik 34bit)   |
| USB                    | 1  |
| Authentication         |  |
| Card type              | M1 card,DESfire card,Felica card   |
| Card reading frequency | 13.56 MHz  |
| General                |  |
| Power supply           | 12 VDC to 24 VDC, 1 A  |
| Working temperature    | -30 °C to 60 °C (-22 °F to 140 °F)   |
| Working humidity       | 0 to 90% (No condensing)   |
| Dimensions             | 91.3 mm × 181.3 mm × 24.5 mm (3.59" × 7.14" × 0.96")   |
| Installation           | Wall mounting  |
| Weight                 | Gross weight: 0.93 kg (2.05 lb)<br>Net weight: 0.36 kg (0.79 lb)   |
| Language               | English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Korean; Japanese |
| Platform               | Hik-ProConnect and HikCentral Professional   |
| Function               |  |
| Face anti-spoofing     | Support  |
| Audio prompt           |  |
| Time synchronization   |  |


## ▪ Available Model

DS-K1T342DWX

DS-K1T342DWX/JAPAN K.K.

DS-K1T342DWX/USA  
DS-K1T342DWX(HIK USA)

## ▪ Dimension

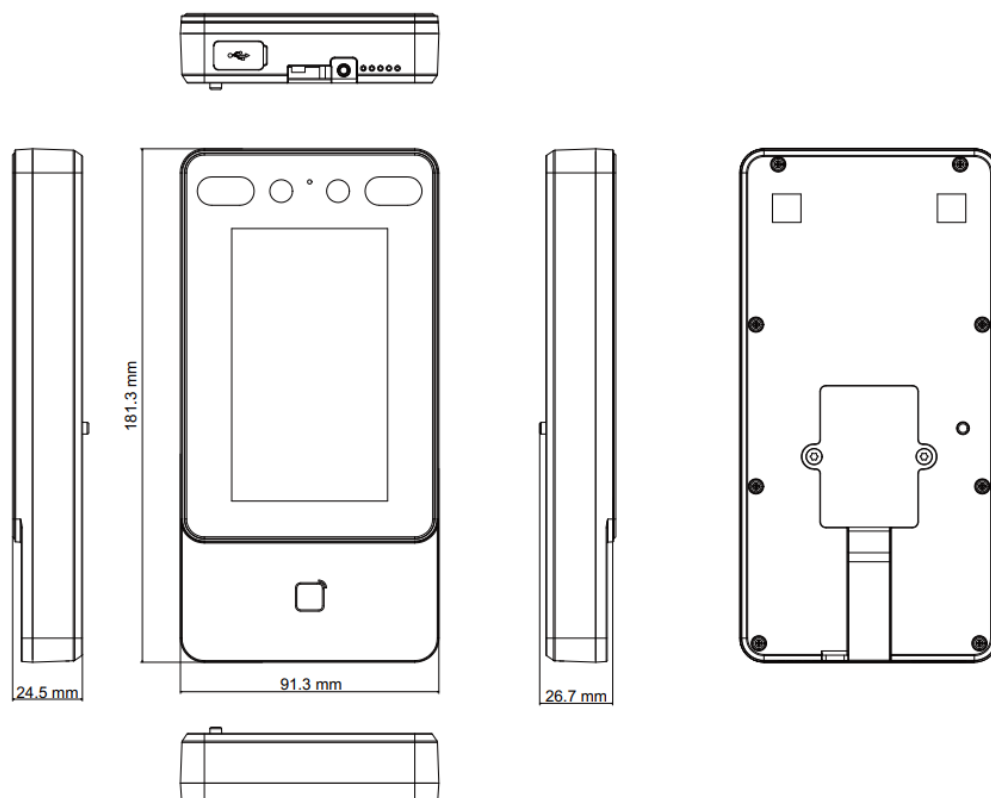

## ▪ Accessory

### ▪ Optional

**DS-KAB6-ZU1**  
Brackets for face  
terminals

**DS-KAB671-P2**  
Stand Stick

**DS-KAB34X-S1**  
Protective Shield

**DS-KAB6-W1**  
Bracket



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq