

DS-K1T670MWX-WEQR **Face Recognition Terminal**



Face recognition terminal is a kind of access control device. It can be widely applied in multiple scenarios, such as enterprises, stations, dwellings, factories, schools, campus and so on.

- Supports call function.
- 7-inch LCD touch screen, 2 Mega pixel wide-angle lens.
- Recognition distance: 0.3 to 3 m.
- Face recognition duration < 0.2 s/User.
- Face recognition accuracy rate ≥ 99%.
- Supports M1 card.
- Face mask detection.
- 6000 face capacity, 50,000 card capacity, and 150,000 event capacity.
- Supports ISAPI, ISUP 5.0, TCP/IP (IPv4 and IPv6).
- Connects with secure door control unit to realize 2 doors control. Using key fobs to control the 2 doors is available.
- Supports single person and multiple people (up to 5 people) recognition.

▪ Specification


| System | |
|----------------------------|---|
| ROM | 4 GB |
| RAM | 1 GB |
| Operation system | Linux |
| Display | |
| Operation method | Capacitive touch screen |
| Resolution | 600 × 1024 |
| Size | 7-inch |
| Type | Touch screen |
| Video | |
| FOV | HFOV= 88°; VFOV= 44° |
| Focal length | 4 mm |
| Aperture | F1.6 |
| Pixel | 2 MP |
| Lens | Dual-lens |
| WDR | Support |
| Video standard | PAL (Default)/NTSC |
| Audio | |
| Audio compression standard | G.711U |
| Audio compression bitrate | 64 Kbps |
| Tone quality | Built-in omnidirectional microphone |
| Volume adjustment | Support |
| Power output | 2 W |
| Network | |
| Communication protocol | IPV4: SADP, SIP, RTSP, ISAPI, ISUP 5.0 IPV6: RTSP, ISAPI |
| Wireless Network | 868 MHz |
| Wi-Fi | Support, 2.4 G, 802.11b/g/n |
| Wired network | Support 10/100/1000 Mbps self-adaptive |
| Interface | |
| Alarm input | 2 |
| Alarm output | 1 |
| USB | 1 Type-A (For Module) |
| Network interface | 1 |
| RS-485 | 1 |
| Wiegand | 1 |
| Lock output | 1 |
| Exit button | 1 |
| Door contact input | 1 |
| TAMPER | 1 |
| Capacity | |
| User capacity | 6000 |
| Card capacity | 50,000 |
| Face capacity | 6000 |
| Event capacity | 150,000 |

| Authentication | |
|--------------------------------|--|
| Face recognition accuracy rate | ≥ 99% |
| Card type | M1 card |
| Card reading distance | 0 to 5 cm |
| Card reading duration | < 1 s |
| Face recognition duration | < 0.2 s per person |
| Face recognition distance | 0.3 to 3 m |
| General | |
| Power supply | 12 VDC/2 A |
| Working temperature | -30 °C to 60 °C (-22 °F to 140 °F) |
| Button | Press the button to call |
| Working humidity | 10 to 90% (no condensing) |
| Power consumption | ≤ 10 W |
| Protective level | IP65 |
| Dimensions | 110.5 mm × 209.2 mm × 24 mm (4.35" × 8.24" × 0.94") |
| Anti-corrosion | 48 H (about 2 years) |
| Weight | Gross Weight : 1.06 kg (2.34 lb) Net Weight : 0.57 kg (1.26 lb) |
| Language | English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Japanese, Korean |
| Function | |
| Configuration via Web browser | Support |
| Hik-Connect | Support |
| Two-way audio | Support |
| Anti-passback | Support |
| First person in | Support |
| QR code recognition | Support |
| Advertisement | Support |
| Face mask recognition | Support |
| Time synchronization | Support |
| Face recognition | Support |
| Face anti-spoofing | Support |
| Live view | Support |
| Audio prompt | Support |

▪ Available Model

DS-K1T670MWX-WEQR

Dimension

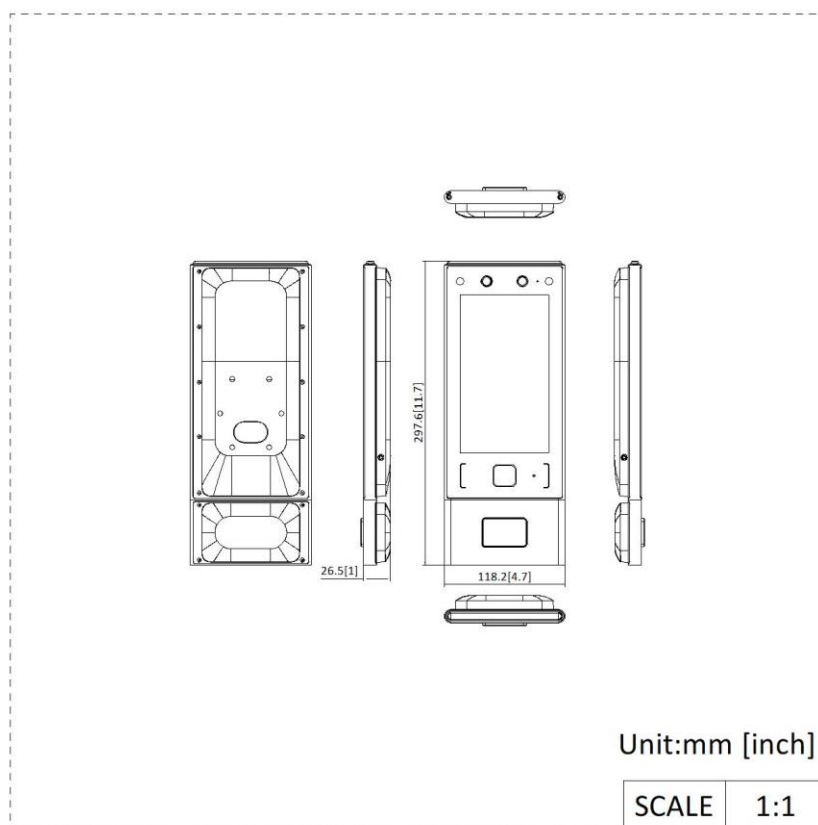

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq