

**DS-2CD3766G2H-LIZSU(Y)(PTRZ)****6 MP Smart Hybrid Light Motorized Varifocal Dome Network Camera****ColorVu**

Hikvision has been dedicated to develop products with security since established. Hikvision always follows security by design principle and has adopted many methods of security technologies into our product development lifecycle, including terminal security, data security, application security, network security, and privacy protection. In the meantime, the security technologies used by Hikvision are all in compliance with local applicable laws and safety regulations. These security measures could enhance product's cyber security protection capability and protect your devices as well as your data from malicious cyber attacks.

- Motorized Pan, Tilt, Rotate, Zoom for easy installation and monitoring
- 24/7 colorful imaging via ColorVu technology
- IR light & White light & Smart Hybrid Light modes
- Clear imaging against strong back light due to 130 dB WDR technology
- Supports Hikvision Embedded Open Platform (HEOP) and importing third party applications
- Supports 1.5 Tops computing power, 40 MB system memory, 350 MB smart RAM, and 2 GB eMMC storage for sharing resources
- Clear two-way audio with dual-array mic
- Water and dust resistant (IP66) and vandal resistant (IK10)
- Audio and alarm interface available

## ▪ Specification

| Camera                  |  |
|-------------------------|--|
| Image Sensor            | 1/1.8" Progressive Scan CMOS   |
| Max. Resolution         | 3200 × 1800  |
| Min. Illumination       | Color: 0.0028 Lux @ (F1.2, AGC ON), 0 Lux with light   |
| Shutter Time            | 1/3 s to 1/100,000 s   |
| Day & Night             | IR cut filter  |
| Angle Adjustment        | Remote adjustment (Max. 1000 cycles)<br>Pan: -175° to 175°, tilt: 0° to 85°, rotate: 0° to 350°  |
| Lens                    |  |
| Lens Type               | Varifocal lens, motorized lens, 2.7 to 13.5 mm   |
| Focal Length & FOV      | 2.7 to 13.5 mm, horizontal FOV 112.3° to 41.2°, vertical FOV 58.1° to 23.1°, diagonal FOV 137.4° to 47.3°  |
| Lens Mount              | Integrated   |
| Focus                   | Auto, Semi-auto, Manual  |
| Iris Type               | DC iris  |
| Aperture                | F1.2   |
| Depth of Field          | 1 m to ∞   |
| DORI                    |  |
| DORI                    | Wide: D: 74.3 m, O: 29.5 m, R: 14.9 m, I: 7.4 m<br>Tele: D: 183.3 m, O: 72.8 m, R: 36.7 m, I: 18.3 m   |
| Illuminator             |  |
| Supplement Light Type   | IR, White Light  |
| Supplement Light Range  | Up to 40 m   |
| Smart Supplement Light  | Yes  |
| IR Wavelength           | 850 nm   |
| HEOP                    |  |
| Open Resources          | Memory: 40 MB,<br>Smart RAM: 350 MB,<br>eMMC: 2 GB   |
| Computing Power         | 1.5 TOPS   |
| Open Capability         | HEOP 2.0 OpendevSDK  |
| Deep Learning Structure | Caffe, PyTorch, TensorFlow, PaddlePaddle, ONNX   |
| Programming Language    | C, C++   |
| Video                   |  |
| Main Stream             | 50 Hz:<br>25 fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)<br>60 Hz:<br>30 fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)   |
| Sub-Stream              | 50 Hz: 25 fps (1280 × 720, 640 × 480, 640 × 360)<br>60 Hz: 30 fps (1280 × 720, 640 × 480, 640 × 360)   |
| Third Stream            | 50 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360)<br>60 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360)<br>*Third stream is supported under certain settings. |

|                             |   |
|-----------------------------|---|
| Fourth Stream               | 50 Hz: 10 fps (1280 × 720, 640 × 480, 640 × 360)<br>60 Hz: 10 fps (1280 × 720, 640 × 480, 640 × 360)<br>*Fourth stream is supported under certain settings.   |
| Video Compression           | Main stream: H.265/H.264/H.264+/H.265+,<br>Sub-stream: H.265/H.264/MJPEG,<br>Third stream: H.265/H.264,<br>Fourth stream: H.265/H.264/MJPEG,<br>*Third stream and fourth stream are supported under certain settings.   |
| Video Bit Rate              | 32 Kbps to 16 Mbps  |
| H.264 Type                  | Baseline Profile, Main Profile, High Profile  |
| H.265 Type                  | Main Profile  |
| Bit Rate Control            | CBR, VBR  |
| Scalable Video Coding (SVC) | H.264 and H.265 encoding  |
| Region of Interest (ROI)    | 5 fixed regions for main stream and sub-stream  |
| Target Cropping             | Yes   |
| <b>Audio</b>                |   |
| Audio Compression           | G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC  |
| Audio Bit Rate              | 64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC-LC)   |
| Audio Sampling Rate         | 8 kHz/16 kHz/32 kHz/44.1 kHz/48 kHz   |
| Environment Noise Filtering | Yes   |
| <b>Network</b>              |   |
| Protocols                   | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SFTP, ARP, SNMP, WebSocket, WebSockets, SRTP  |
| Simultaneous Live View      | Up to 6 channels  |
| API                         | ONVIF (Profile S, Profile G, Profile T), ISAPI, SDK, ISUP   |
| User/Host                   | Up to 32 users<br>3 user levels: administrator, operator, and user  |
| Security                    | Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for Open Network Video Interface, RTP/RTSP over HTTPS, control timeout settings, security audit log, TLS 1.1/1.2/1.3, host authentication (MAC address) |
| Network Storage             | NAS (NFS, SMB/CIFS), Auto Network Replenishment (ANR),<br>Together with high-end Hikvision memory card, memory card encryption and health detection are supported.  |
| Client                      | iVMS-4200, Hik-Connect, Hik-Central   |
| Web Browser                 | Plug-in required live view: IE 11,<br>Plug-in free live view: Chrome 80+, Firefox 89+, Edge 89+, Safari 13+,<br>Local service: Chrome 80+, Firefox 89+, Edge 89+, Safari 13+  |
| <b>Image</b>                |   |
| Image Parameters Switch     | Yes   |
| Image Settings              | Rotate mode, saturation, brightness, contrast, sharpness, gain, white balance, adjustable by client software or web browser   |
| Day/Night Switch            | Day, Night, Auto, Schedule  |

|                                  |   |
|----------------------------------|---|
| Wide Dynamic Range (WDR)         | 130 dB  |
| Image Enhancement                | BLC, HLC, 3D DNR, Defog   |
| SNR                              | ≥ 52 dB   |
| Privacy Mask                     | 4 programmable polygon privacy masks  |
| <b>Interface</b>                 |   |
| Ethernet Interface               | 1 RJ45 10 M/100 M self-adaptive Ethernet port   |
| On-Board Storage                 | Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB   |
| Built-in Microphone              | Yes, 2 built-in microphones   |
| Audio                            | 1 input (line in), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 4.7 KΩ, interface type: non-equilibrium,<br>1 output (line out), two-core terminal block, max. output amplitude: 3.3 Vpp, output impedance: 100 Ω, interface type: non-equilibrium  |
| Alarm                            | 1 input, 1 output (max. 24 VDC/24 VAC, 1 A)   |
| Reset Key                        | Yes   |
| <b>Event</b>                     |   |
| Basic Event                      | Motion detection (support alarm triggering by specified target types (human and vehicle)), video tampering alarm, exception   |
| Smart Event                      | scene change detection, audio exception detection, defocus detection  |
| Linkage                          | Upload to FTP/NAS/memory card, notify surveillance center, send email, trigger recording, trigger capture, trigger alarm output, audible warning  |
| <b>Deep Learning Function</b>    |   |
| Face Capture                     | Yes   |
| People Counting                  | Yes   |
| Perimeter Protection             | Line crossing, intrusion, region entrance, region exiting<br>Support alarm triggering by specified target types (human and vehicle)   |
| <b>General</b>                   |   |
| Power                            | 12 VDC ± 25%, 1.35 A, max. 16 W, two-core terminal block, reverse polarity protection, PoE: IEEE 802.3at, Class 4, max. 18 W  |
| Dimension                        | Ø155 mm × 140.4 mm (Ø6.10" × 5.53")   |
| Package Dimension                | 244 mm × 174 mm × 173 mm (9.6" × 6.9" × 6.8")   |
| Weight                           | Approx. 835 g (1.8 lb.)   |
| With Package Weight              | Approx. 1285 g (2.8 lb.)  |
| Storage Conditions               | -30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)   |
| General Function                 | Heartbeat, anti-banding, mirror, flash log, password reset via email, pixel counter   |
| Startup and Operating Conditions | -30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)   |
| Language                         | 33 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian |
| <b>Approval</b>                  |   |
| EMC                              | CE-EMC: EN 55032: 2015, EN 61000-3-2:2019, EN 61000-3-3: 2013+A1:2019, EN 50130-4: 2011 +A1: 2014,<br>RCM: AS/NZS CISPR 32: 2015,<br>IC: ICES-003: Issue 7  |

|             |   |
|-------------|---|
| Safety      | UL: UL 62368-1,<br>CB: IEC 62368-1: 2014+A11,<br>CE-LVD: EN 62368-1: 2014/A11: 2017 |
| Environment | CE-RoHS: 2011/65/EU,<br>WEEE: 2012/19/EU,<br>Reach: Regulation (EC) No 1907/2006    |
| Protection  | IK10: IEC 62262:2002, IP66: IEC 60529-2013  |

## ▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.


This model has NO SPECIFIC PROTECTION.

| Level                  | Description  |
|------------------------|--|
| Top-level protection   | Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.   |
| Moderate protection    | Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain. |
| No specific protection | Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.  |

## ▪ Available Model



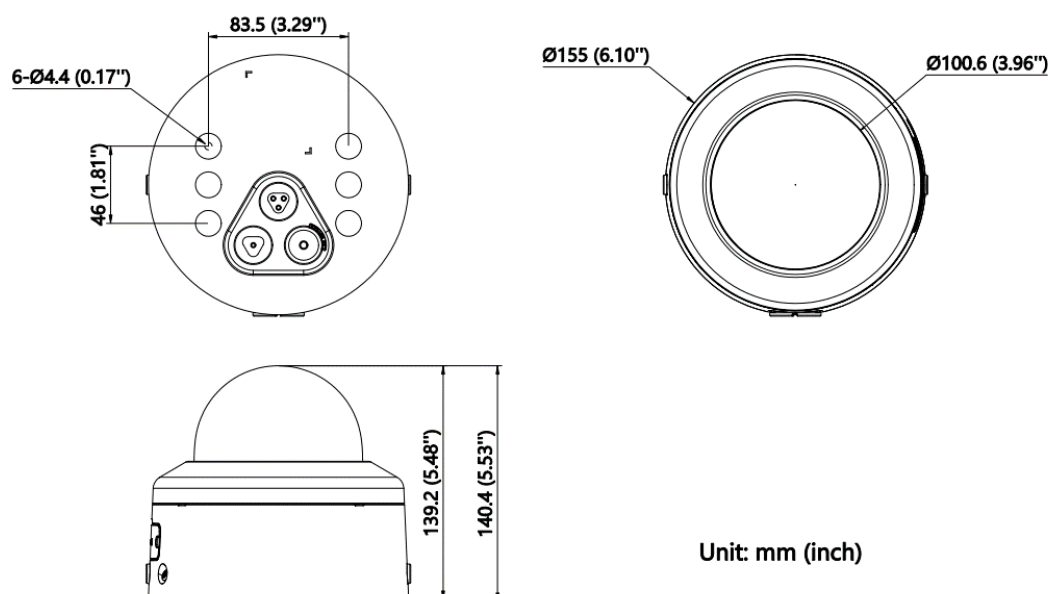


DS-2CD3766G2H-LIZSU(PTRZ)(2.7-13.5mm)

## ▪ Dimension



▪ **Accessory**

▪ **Optional**

| DS-1473ZJ-155<br>Wall mount   | DS-1471ZJ-155<br>Pendant Mount  | DS-1475ZJ-SUS<br>Vertical pole mount  | DS-1476ZJ-SUS<br>Corner mount   | DS-1250ZJ<br>Water-proof  |
|---|---|---|---|---|
|  |  |  |  |  |

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

